


# Architecture Overview

The above diagram shows BPX network architecture. A single machine can run more than one of these processes. Typical BPX network full node consist of two processes: Beacon Client and Execution Client. Additionally, Farmer and Harvester are activated to farm new blocks.

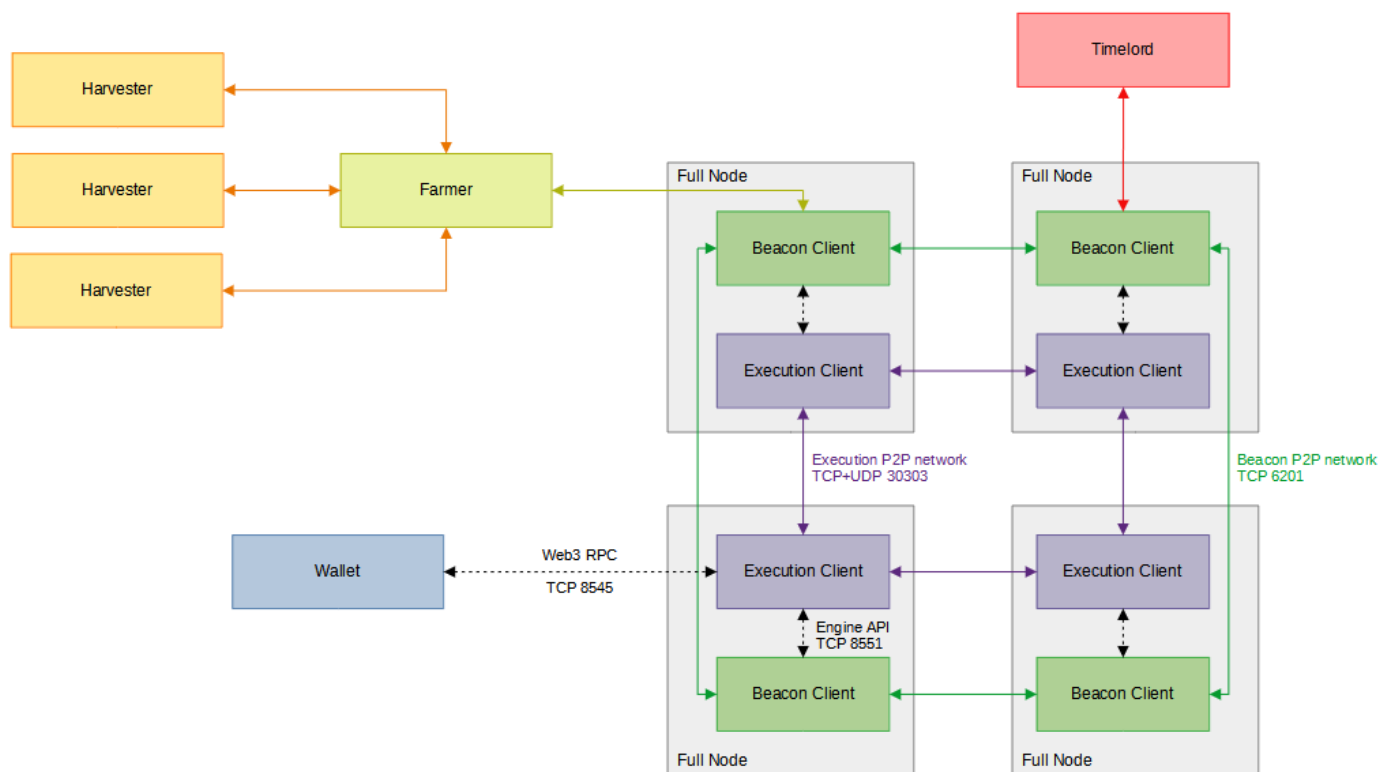

Revision #2

Created 5 June 2023 11:20:50 by Admin

Updated 5 June 2023 12:37:21 by Admin