



# Deploying a smart contract on BPX mainnet using Remix IDE


1. Open [Remix IDE](#).

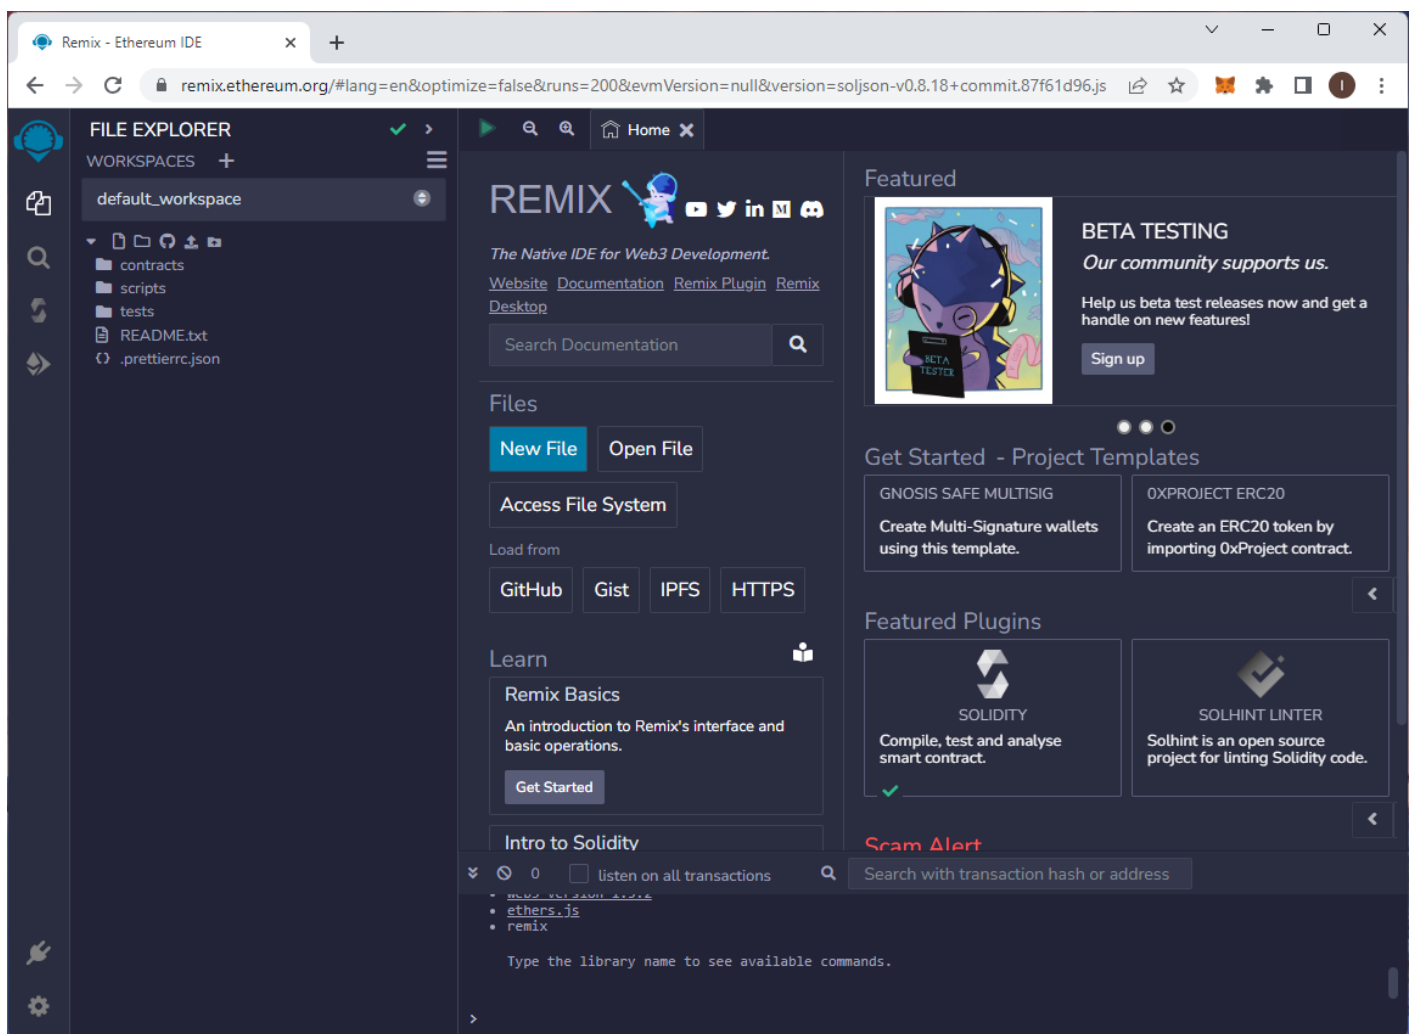


2. In our example, we will use one of the sample contracts from the IDE. This contract provides two functions: the first, `store`, allows you to save any number in the contract, while the second, `retrieve`, enables you to read the stored number. Open the `contracts/1_Storage.sol` file.

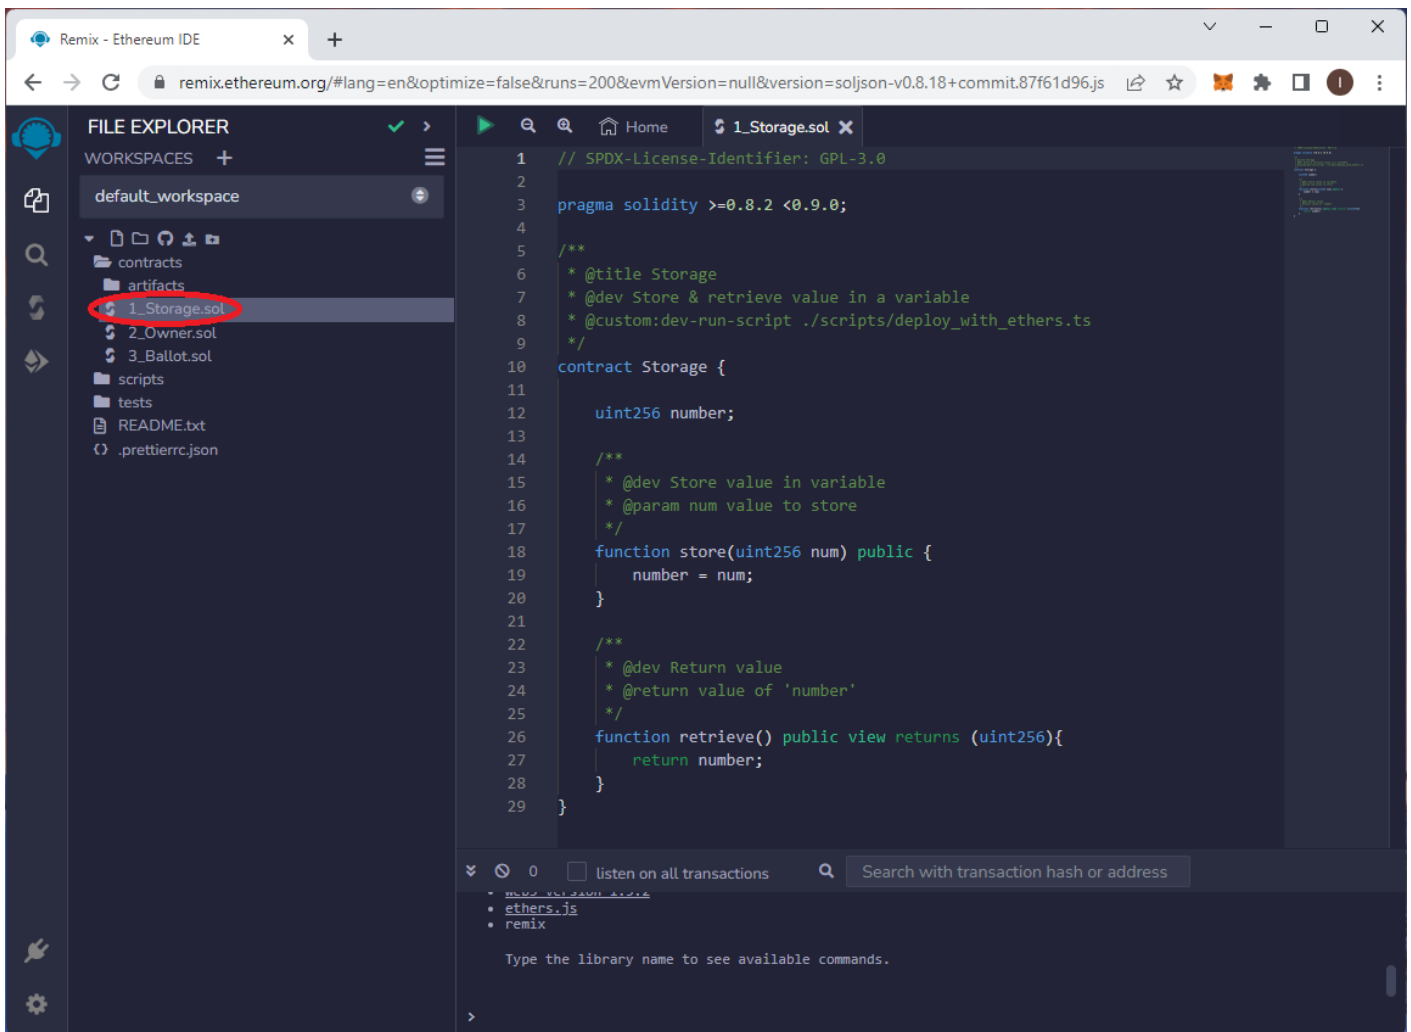


3. Compile the contract by right-clicking on the file name and selecting **Compile**.

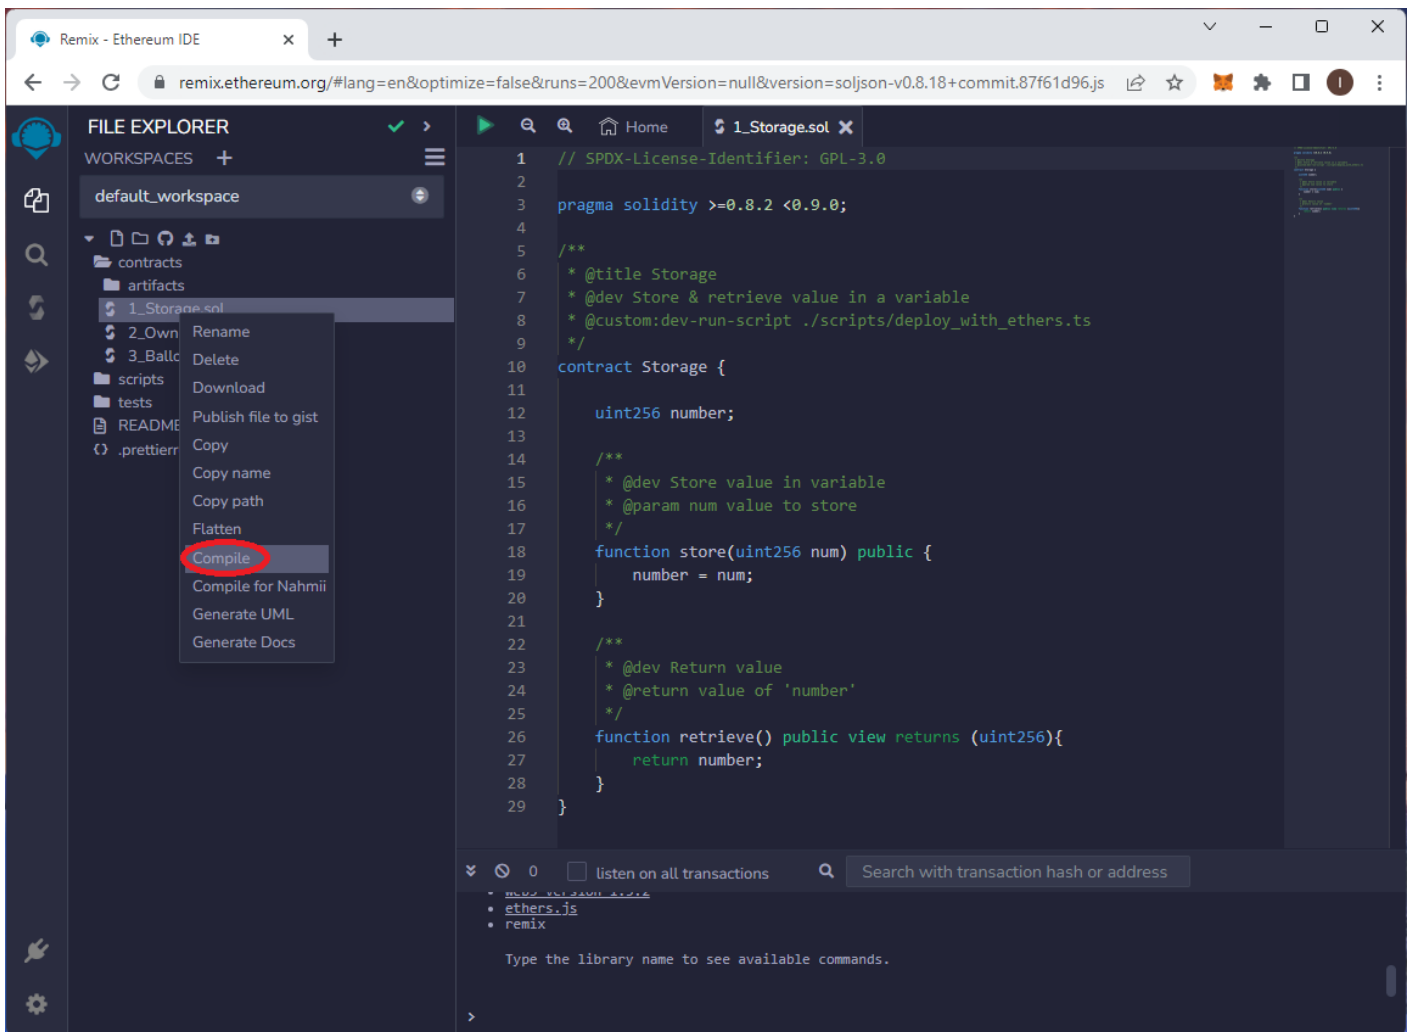


4. When the source code is error-free and the compilation is successful, you will see a green success icon.

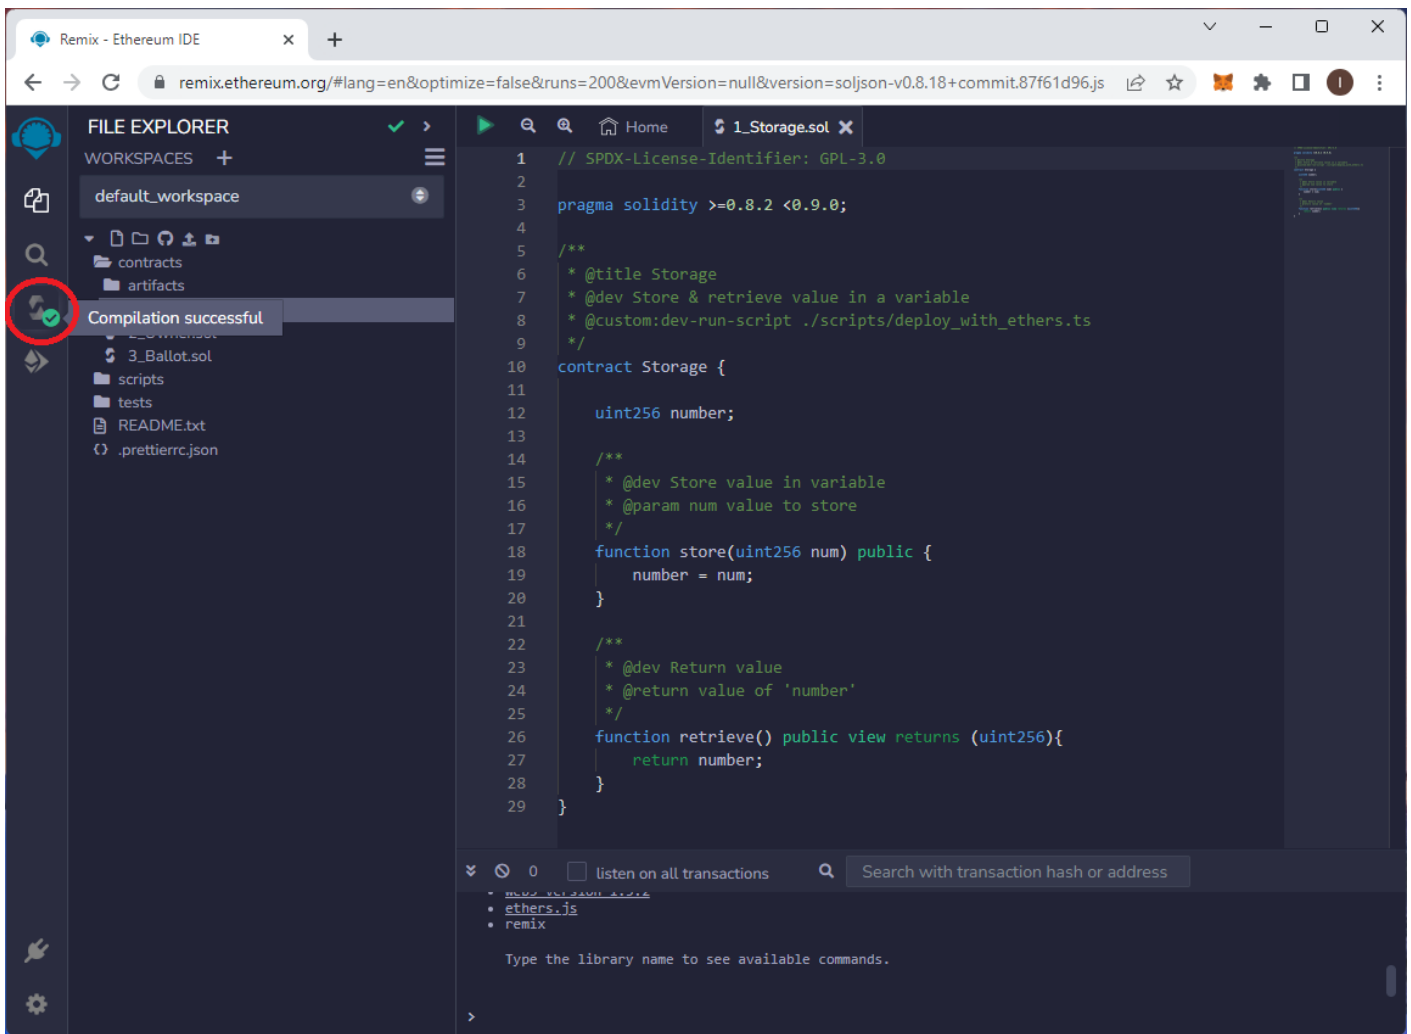

5. Go to the **Deploy** tab.

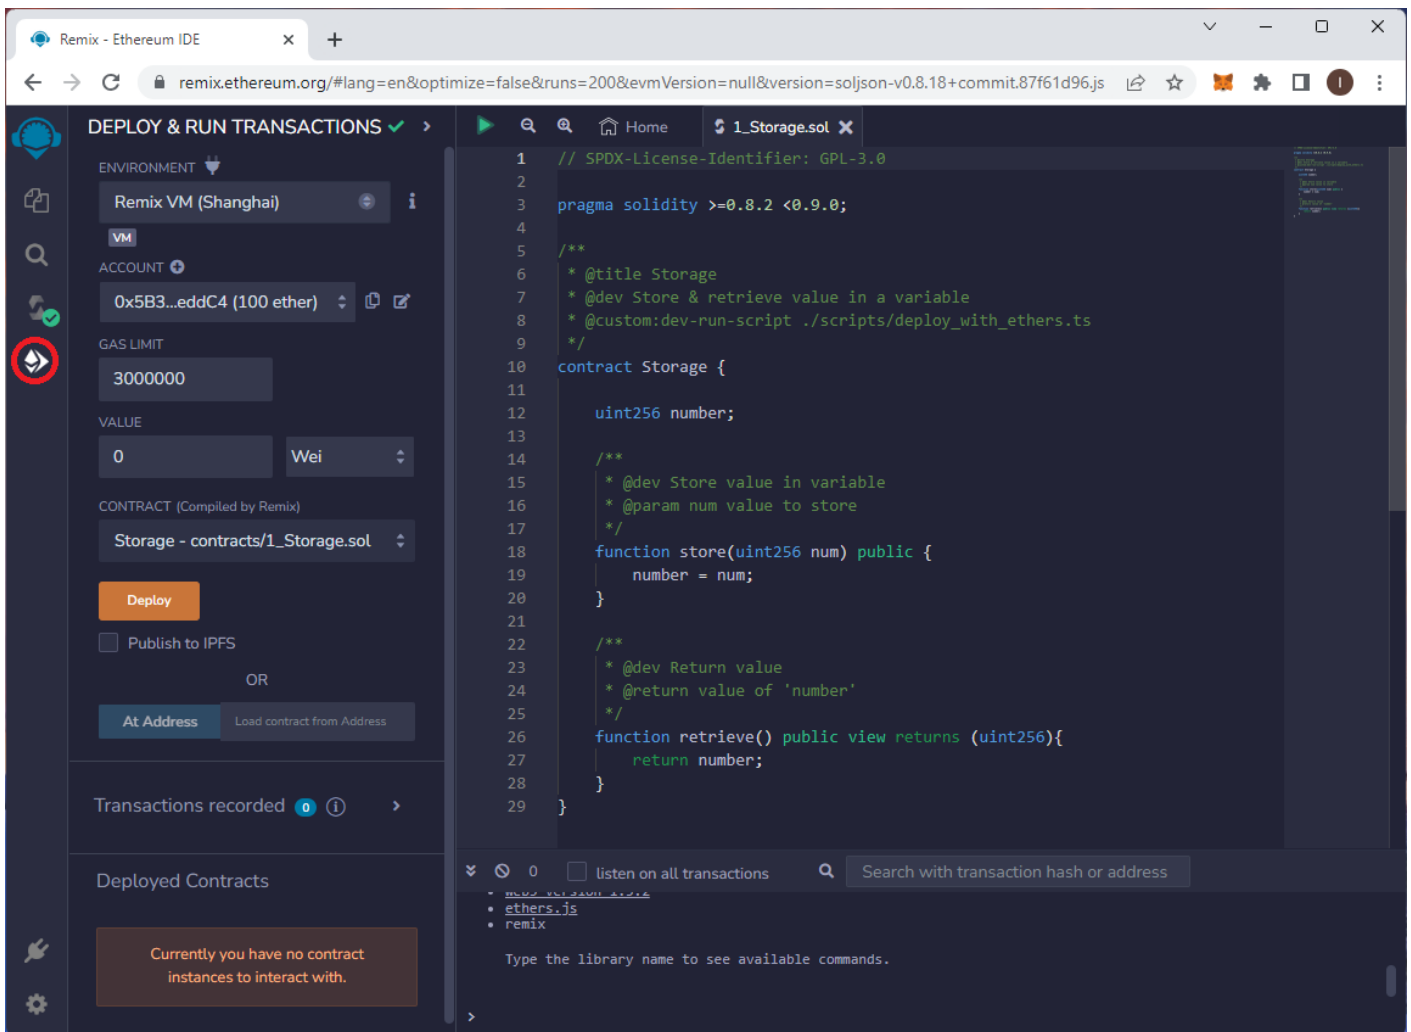

6. Expand the **Environment** list and select **Injected Provider - MetaMask**.

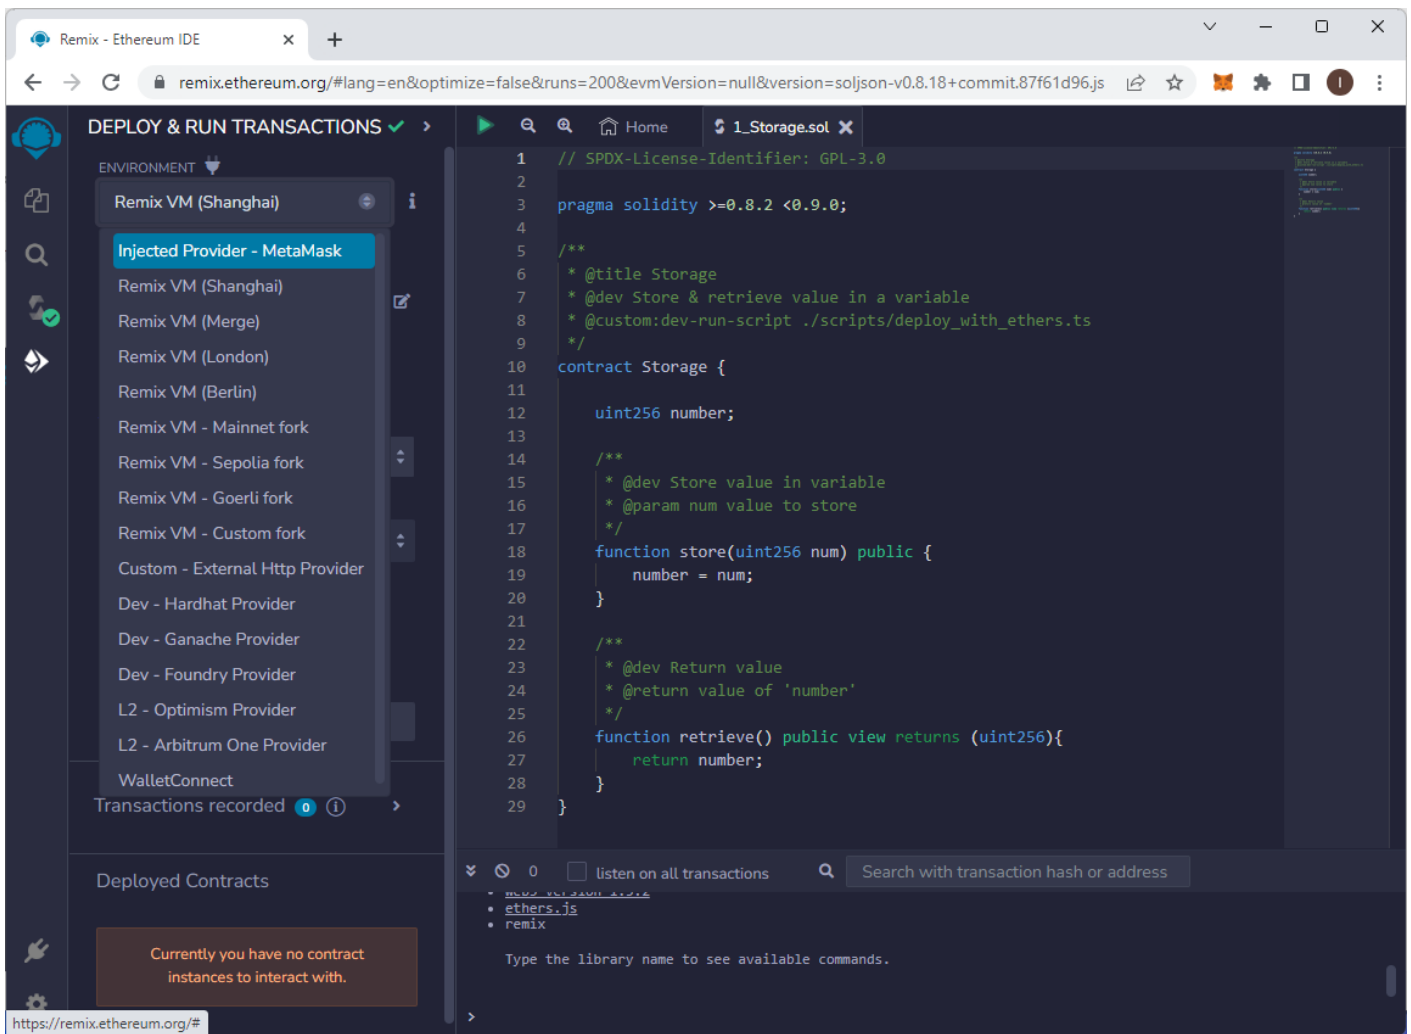

7. Now MetaMask will prompt you for permission to connect to Remix IDE. Agree to the connection.

## Connect with MetaMask

Select the account(s) to use on this site

[New account](#)



Account 1 (0xfdb...cd...  
1240279.9999685 BPX



Only connect with sites you trust. [Learn more](#)

Cancel

Next

## Connect to Account 1 (0xfdb...cda3)

Allow this site to:



See address, account balance, activity  
and suggest transactions to approve

Only connect with sites you trust. [Learn more](#)

Cancel

Connect

8. After successfully connecting, you should see your account address and its balance in the highlighted field.

Remix - Ethereum IDE

remix.ethereum.org/#lang=en&optimize=false&runs=200&evmVersion=null&version=soljson-v0.8.18+commit.87f61d96.js

### DEPLOY & RUN TRANSACTIONS

ENVIRONMENT

Injected Provider - MetaMask

Main (1) network

ACCOUNT

0xFDb...3cda3 (1240279.9%)

GAS LIMIT

3000000

VALUE

0 Wei

CONTRACT (Compiled by Remix)

Storage - contracts/1\_Storage.sol

Deploy

☐ Publish to IPFS

OR

At Address Load contract from Address

Transactions recorded 0

Deployed Contracts

Currently you have no contract instances to interact with.

```
1 // SPDX-License-Identifier: GPL-3.0
2
3 pragma solidity >=0.8.2 <0.9.0;
4
5 /**
6  * @title Storage
7  * @dev Store & retrieve value in a variable
8  * @custom:dev-run-script ./scripts/deploy_with_ethers.ts
9  */
10 contract Storage {
11
12     uint256 number;
13
14     /**
15      * @dev Store value in variable
16      * @param num value to store
17      */
18     function store(uint256 num) public {
19         number = num;
20     }
21
22     /**
23      * @dev Return value
24      * @return value of 'number'
25      */
26     function retrieve() public view returns (uint256){
27         return number;
28     }
29 }
```

0 ☐ listen on all transactions





Search with transaction hash or address

ethers.js  
remix

Type the library name to see available commands.


9. Click "**Deploy**" to begin deploying your contract. Confirm the suggested gas settings.



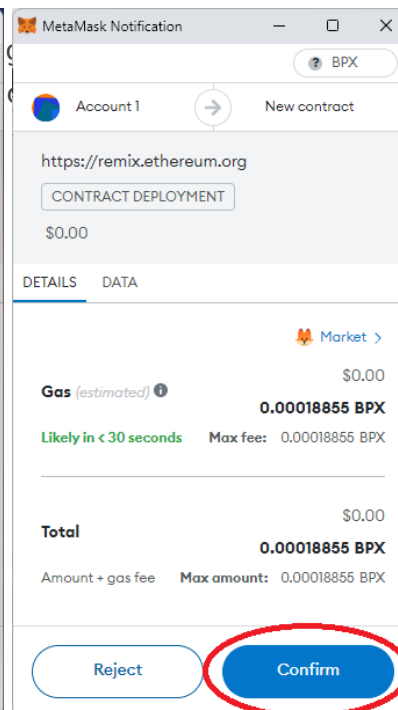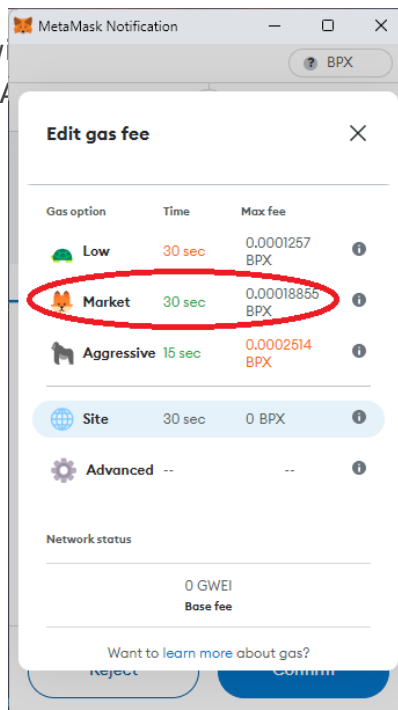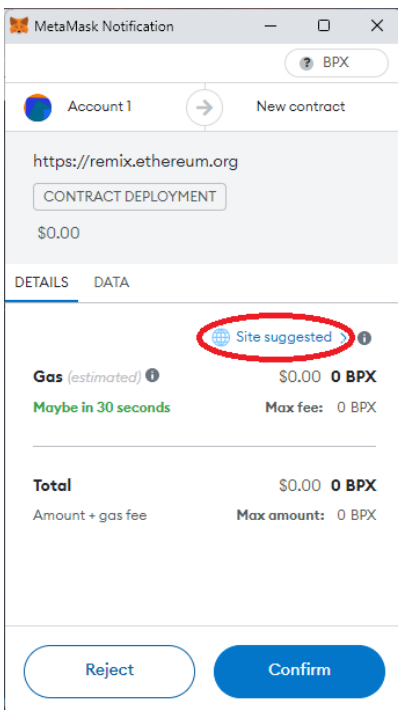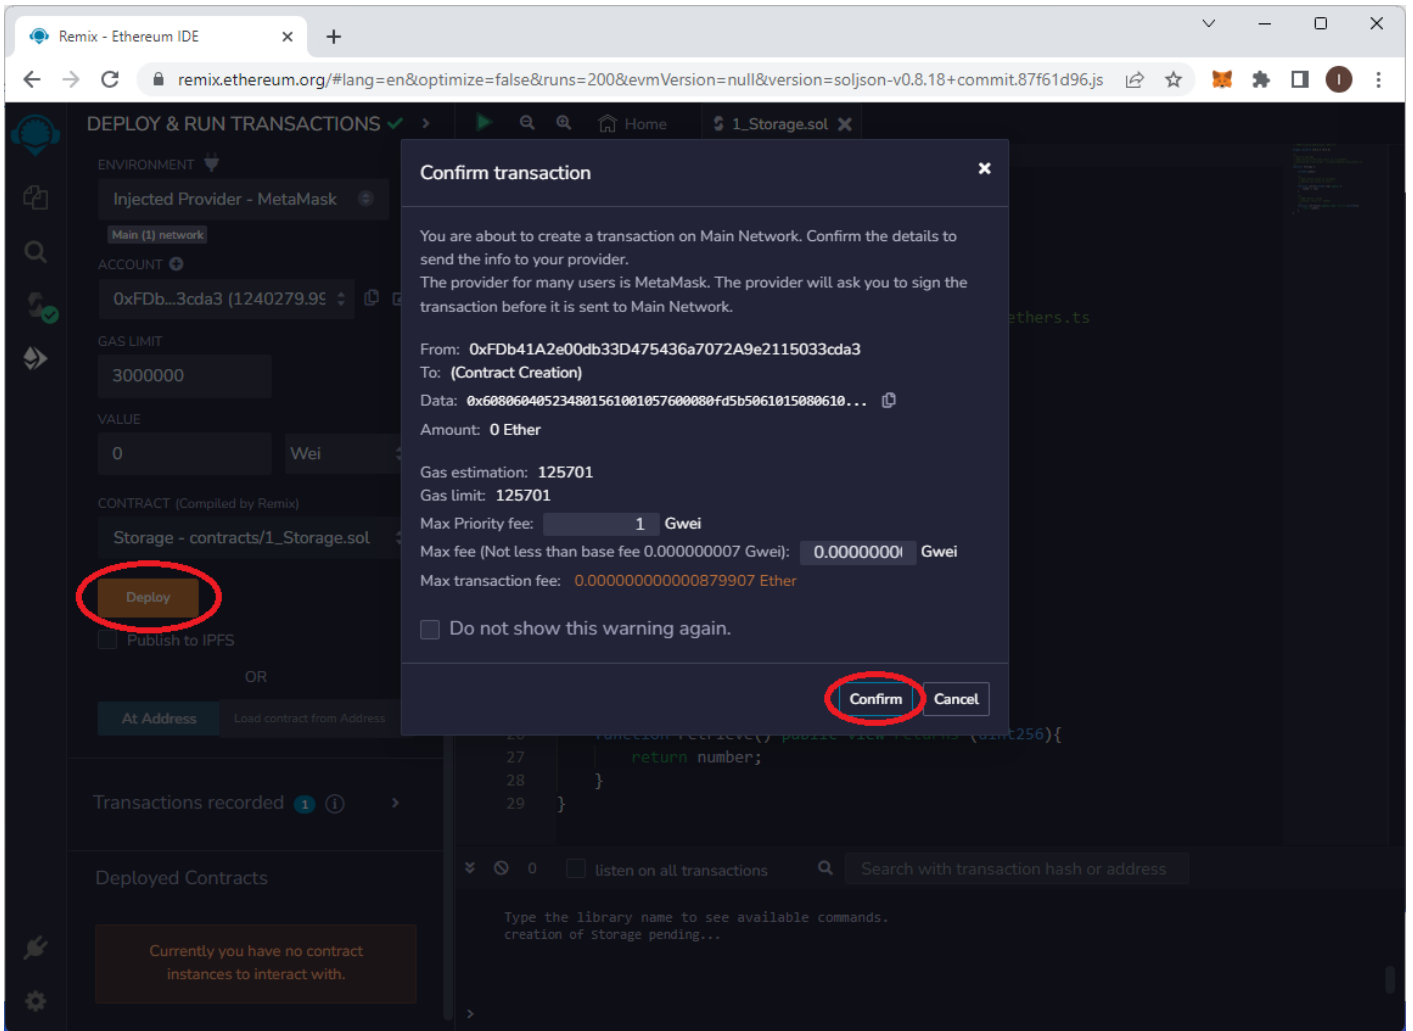

ested," then

11. Your contract is now deploying. If you open the MetaMask window, you should see a new pending transaction.

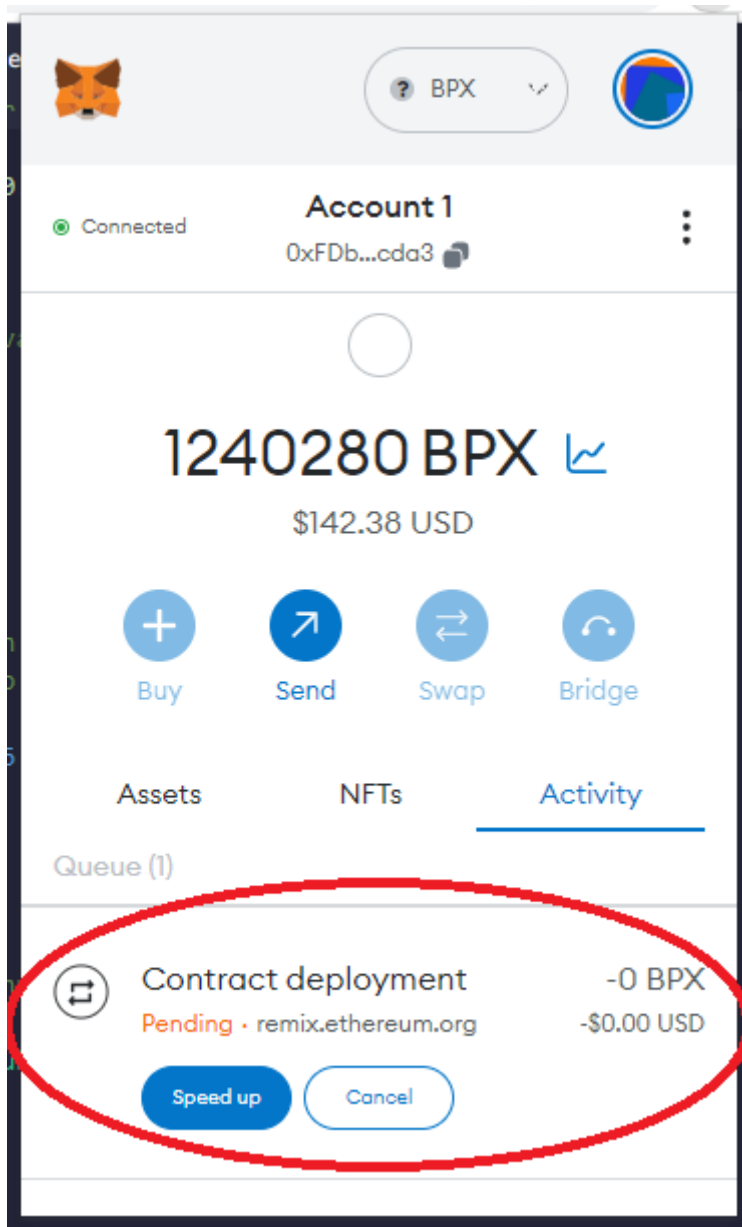

12. Once the transaction is confirmed by the blockchain, you will see its confirmation and a new entry in the Deployed Contracts section. Your contract has been successfully deployed.

Remix - Ethereum IDE

remix.ethereum.org/#lang=en&optimize=false&runs=200&evmVersion=null&version=soljson-v0.8.18+commit.87f61d96.js

### DEPLOY & RUN TRANSACTIONS

ENVIRONMENT: Injected Provider - MetaMask

ACCOUNT: 0xFDb...3cda3 (1240279.99%)

GAS LIMIT: 3000000

VALUE: 0 Wei

CONTRACT (Compiled by Remix): Storage - contracts/1\_Storage.sol

Deploy

☐ Publish to IPFS

OR

At Address: Load contract from Address

Transactions recorded: 1

#### Deployed Contracts

- STORAGE AT 0X5CD...0E9B3 (BLOC)

```
1 // SPDX-License-Identifier: GPL-3.0
2
3 pragma solidity >=0.8.2 <0.9.0;
4
5 /**
6  * @title Storage
7  * @dev Store & retrieve value in a variable
8  * @custom:dev-run-script ./scripts/deploy_with_ethers.ts
9  */
10 contract Storage {
11
12     uint256 number;
13
14     /**
15      * @dev Store value in variable
16      * @param num value to store
17      */
18     function store(uint256 num) public {
19         number = num;
20     }
21
22     /**
23      * @dev Return value
24      * @return value of 'number'
25      */
26     function retrieve() public view returns (uint256){
27         return number;
28     }
29 }
```

view on etherscan

[block:27514 txIndex:0] from: 0xFDb...3cda3 to: Storage.(constructor) value: 0 wei  
data: 0x608...20033 logs: 0 hash: 0x570...4e2d4

Debug

13. You can use the highlighted button to copy the address of your new contract.

The screenshot displays the Remix Ethereum IDE interface. On the left sidebar, the 'DEPLOY & RUN TRANSACTIONS' panel is active, showing the environment set to 'Injected Provider - MetaMask' on the 'Main (1) network'. The account '0xFDb...3cda3 (1240279.99)' is selected with a gas limit of '3000000' and a value of '0 Wei'. The contract 'Storage - contracts/1\_Storage.sol' is selected for deployment. A 'Deploy' button is visible, along with options to 'Publish to IPFS' or 'Load contract from Address'. Below this, it shows 'Transactions recorded' and 'Deployed Contracts'. In the 'Deployed Contracts' section, a contract at address '0x5CD...0E9B3' is listed, and a red circle highlights the icon used to interact with it.

The main editor displays the Solidity code for '1\_Storage.sol':

```
1 // SPDX-License-Identifier: GPL-3.0
2
3 pragma solidity >=0.8.2 <0.9.0;
4
5 /**
6  * @title Storage
7  * @dev Store & retrieve value in a variable
8  * @custom:dev-run-script ./scripts/deploy_with_ethers.ts
9  */
10 contract Storage {
11
12     uint256 number;
13
14     /**
15      * @dev Store value in variable
16      * @param num value to store
17      */
18     function store(uint256 num) public {
19         number = num;
20     }
21
22     /**
23      * @dev Return value
24      * @return value of 'number'
25      */
26     function retrieve() public view returns (uint256){
27         return number;
28     }
29 }
```

At the bottom, the 'Transactions' panel shows a successful transaction: '[block:27514 txIndex:0] from: 0xFDb...3cda3 to: Storage.(constructor) value: 0 wei data: 0x608...20033 logs: 0 hash: 0x570...4e2d4'. A 'Debug' button is also present.

14. You can interact with your contract directly from the IDE. Expand the list of contract methods to access them.

The screenshot displays the Remix Ethereum IDE interface. On the left, the 'DEPLOY & RUN TRANSACTIONS' sidebar is active. It shows a 'VALUE' of 0 Wei, a 'CONTRACT' dropdown set to 'Storage - contracts/1\_Storage.sol', and a 'Deploy' button. Below this, there are options to 'Publish to IPFS' or 'At Address'. The 'Transactions recorded' section shows one transaction. The 'Deployed Contracts' section lists 'STORAGE AT 0x5CD...0E9B3 (BLK)' with a balance of 0 ETH. Below this, there are 'store' and 'retrieve' buttons. The 'store' button is highlighted with a red circle. The 'Low level interactions' section shows a 'CALLDATA' field and a 'Transact' button.

The main editor displays the Solidity code for the 'Storage' contract:

```
1 // SPDX-License-Identifier: GPL-3.0
2
3 pragma solidity >=0.8.2 <0.9.0;
4
5 /**
6  * @title Storage
7  * @dev Store & retrieve value in a variable
8  * @custom:dev-run-script ./scripts/deploy_with_ethers.ts
9  */
10 contract Storage {
11
12     uint256 number;
13
14     /**
15      * @dev Store value in variable
16      * @param num value to store
17      */
18     function store(uint256 num) public {
19         number = num;
20     }
21
22     /**
23      * @dev Return value
24      * @return value of 'number'
25      */
26     function retrieve() public view returns (uint256){
27         return number;
28     }
29 }
```

At the bottom, the console shows a successful transaction: '[block:27514 txIndex:0] from: 0xFDb...3cda3 to: Storage.(constructor) value: 0 wei data: 0x608...20033 logs: 0 hash: 0x570...4e2d4'. A 'Debug' button is visible next to the console output.

15. Let's call the first function (`store`) to save a number in our sample contract. Enter a random number in the text field next to the "**store**" button, and then press the "**store**" button.

The screenshot displays the Remix Ethereum IDE interface. On the left, the 'DEPLOY & RUN TRANSACTIONS' sidebar is active. It shows a 'VALUE' of 0 Wei, a 'CONTRACT' dropdown set to 'Storage - contracts/1\_Storage.sol', and a 'Deploy' button. Below this, there's a section for 'Deployed Contracts' showing a contract named 'STORAGE AT 0x5CD...0E9B3 (BLK)' with a balance of 0 ETH. A red circle highlights the 'store' button next to the value '150'. Below the deployed contracts, there's a 'Low level interactions' section with a 'CALLDATA' input field and a 'Transact' button. The main editor area shows the Solidity code for the 'Storage' contract, which includes a 'store' function and a 'retrieve' function. The bottom status bar shows a transaction confirmation: '[block:27521 txIndex:0] from: 0xFDb...3cda3 to: Storage.store(uint256) 0x5CD...0E9B3 value: 0 wei data: 0x605...00096 logs: 0 hash: 0x8a5...01de0'.

16. Confirm the transaction in your wallet as you did when deploying the contract. Saving data to a smart contract requires a transaction on the blockchain.

17. When the transaction is confirmed, call the second method (`retrieve`) to read the number stored in the smart contract. Click the "**retrieve**" button, and the blockchain will return the value stored in the contract.

The screenshot displays the Remix Ethereum IDE interface. The top bar shows the browser address: `remix.ethereum.org/#lang=en&optimize=false&runs=200&evmVersion=null&version=soljson-v0.8.18+commit.87f61d96.js`. The left sidebar contains navigation icons and a 'DEPLOY & RUN TRANSACTIONS' panel. This panel includes a 'VALUE' input set to '0' with a unit dropdown set to 'Wei', a 'CONTRACT' dropdown set to 'Storage - contracts/1\_Storage.sol', and buttons for 'Deploy', 'Publish to IPFS', and 'At Address'. Below these are 'Transactions recorded' and 'Deployed Contracts' sections. The 'Deployed Contracts' section shows a contract at address '0x5CD...0E9B3' with a balance of '0 ETH'. It features two buttons: 'store' and 'retrieve'. The 'retrieve' button is circled in red, and below it, the text '0: uint256: 150' is visible. The 'Low level interactions' section at the bottom left shows a 'CALLDATA' input and a 'Transact' button. The main editor area displays the Solidity code for '1\_Storage.sol', which defines a 'Storage' contract with a 'number' variable, a 'store' function, and a 'retrieve' function. The bottom right panel shows a transaction log with a call from '0xFDb41A2e00db330475436a7072A9e2115033cda3' to 'Storage.retrieve()' with data '0x2e6...4cec1'. A 'Debug' button is also present.

```
1 // SPDX-License-Identifier: GPL-3.0
2
3 pragma solidity >=0.8.2 <0.9.0;
4
5 /**
6  * @title Storage
7  * @dev Store & retrieve value in a variable
8  * @custom:dev-run-script ./scripts/deploy_with_ethers.ts
9  */
10 contract Storage {
11
12     uint256 number;
13
14     /**
15      * @dev Store value in variable
16      * @param num value to store
17      */
18     function store(uint256 num) public {
19         number = num;
20     }
21
22     /**
23      * @dev Return value
24      * @return value of 'number'
25      */
26     function retrieve() public view returns (uint256){
27         return number;
28     }
29 }
```

Revision #3

Created 8 June 2023 07:45:26 by Admin

Updated 5 November 2024 12:05:12 by Admin